



2 In 1 Signal Superimpose



4 In 1 Signal Superimpose



8 In 1 Signal Superimpose

Features


- ◆ Transmit Control Signals and Multi-Group Video Signals Simultaneously on one Coaxial Cable
- ◆ Flexible and Convenient to Choose Signal , Multi-road Video Signals or Multi - Road Video Signals and 1-road Rs485 Control Signals Can Be Superimposed Under one Coaxial Cable as to the Actual
- ◆ Support all Communication Protocols, Rs485 Control Signals Transmit Without any Restriction from Protocols and Baud Rate
- ◆ Adopt the integrated chip with Advanced technology solutions and high performance to ensure the Stability of Equipment in long time

Specifications

Model	KA-XT2000	KA-XT4000	KA-XT8000
Nominal input & output level	1Vp-p		
Nominal input & output impedance	75Ω		
Working voltage	DC 12V ± 5%		
Power (Signal input)	3W	4W	8.5W
Power (Signal output)	3W	4W	9.5W
Operating temperature	-40°C ~ +50°C		
Dimension	114(W) X 71 (D) X 26(H)	166(W) X 156(D) X 38 (H)	294(W) X 156 (D) X40 (H)

PTZ Cameras Wiring Diagram

Wiring Diagram

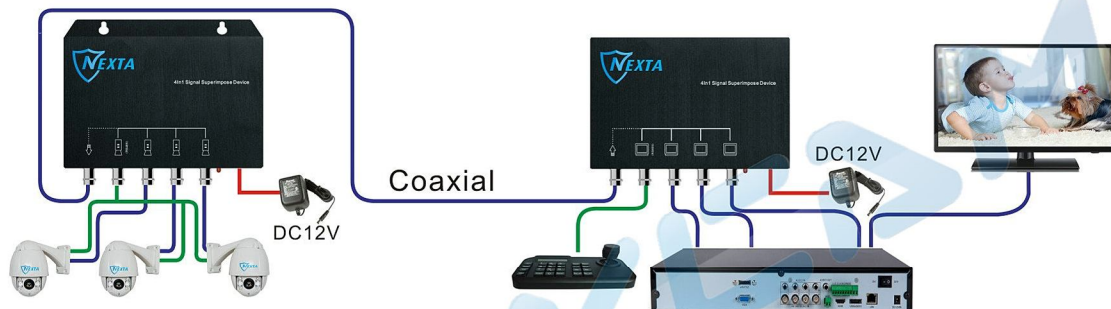

Cameras Wiring Diagram

