


2 Megapixels IR Water-proof Bullet Camera




HD CCTV
Over Coax

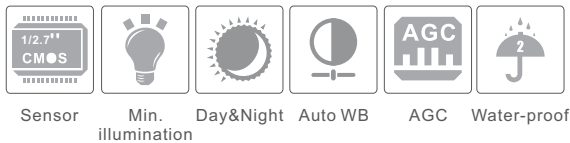

Features

- + HD CCTV over coax cable
- + 1/2.7" SONY Exmor Image Sensor ,
2.1 Megapixel CMOS Sensor
- + 1080 HD Resolution, Pixel Effect :1920 x 1080 ,
No Delay Live View , No compression
- + AHD 1080P + Analog 960H Hybrid Feed
Video Output Signal
- + Extremely long Distance transmission over coaxial
without repeater (300M)
- + Support WDR, HLI, BLC for control light Exposure at
strong light environment issue
- + Support 2D and 3D Low light high sensitivity
and noise reduction
- + Double ICR Switch perform True Day and Night Video
- + 20m IR night view distance effective
- + IP66 Ingress Protection

Dimensions

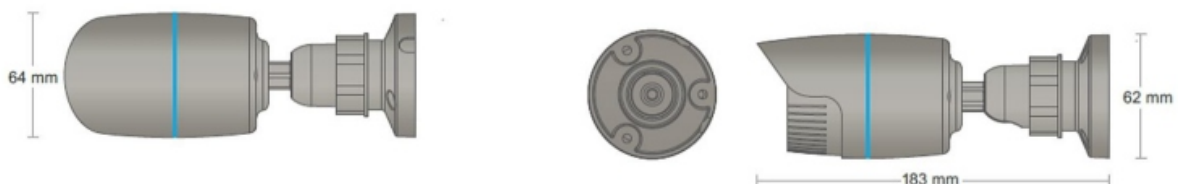

Specifications

Model	KIR-2AA-152-36M
Image Sensor	1.2.7" CMOS SONY Exmor : 2.1 Mega Pixel
Effective Resolution	1920(H) x 1080(V) @ 25FPS
Video Ouput	AHD 1080P / 960H @ 1 BNC Feed Output ,1x AHD or 960H
S/N	Above 40dB
Scanning System	Progressive Scan
Min. Illumination	0.01LUX(F1.2, AGC ON)
Functions	
Lens	3.6mm/6mm(Optional)
IR Effective	24 IR LED , 20M IR Distance
Day&Night switch	AUTO/ Color / B/W / EXT
Back Light Compensation(BLC)	OFF / BLC / HSBLC
AGC	Adjustable 0 ~ 15
Electronic Shutter Speed	AUTO/ Manual
White Balance	AWB / ATW / AWC / Indoor / Outdoor
Sense-Up	OFF / X2 ~ X30
2D/3D-NR	2DNR (Low / Medium / High) / 3DNR (Low / Medium / High) / Smart IR
DWDR	Auto / OFF / ON (0~ 8)
Defog	OFF / AUTO (Size and Gradation)
Brightness	Adjustable
Adjust	Sharpness / Monitor / LSC
Privacy	4 Zone
D-Effect	Freeze / Mirror (Rotate / Mirror / V-Flip) / Negative Image
Motion Detection	Yes
AHD and 960H	OSD switch control
Video space	1H @ 1.32GB
Enviromental	
Operating Temp	-10 C ~ 50 C
Power Consumption	
Operating Voltage	DC12V / 90mA / 275mA (IR ON)
Mechanical	
weight	0.32KG